

## 商品説明

 사이테크놀로지스(주)	商品名	SAI-B-2073RPS
	HP	<a href="https://tjcctv.co.kr/">https://tjcctv.co.kr/</a>



包装	サイズ	個数	重さ	備考
1個あたり		1	820g	
内寸	-			
外寸	-			

FOB	
MOQ	10PCS
サンプル提供価格	2,000,000 KRW

商品仕様	
分類名称	保安用カメラ
原産地	大韓民国
資源再利用可否	該当なし
重さ	820g
内容量	-
セット内容	84Φ × 332.6(L) × 90(H) mm
使用期限	-

使用方法
保安用カメラとして録画装備と連携して使用

注意事項
衝撃注意、ネットワーク構成に関する知識が必要

企業紹介
映像監視装置の専門製造企業であり、主に政府調達市場で売上がある。 最近ではAIで事業領域を拡大している。

主要輸出国
米国

## Automatic polarization control system , Bullet **SAI-B-2073RPS**



Automatic polarization control system		0° 23° 45° 67° 90°
Polarization angle	ROI	On / off
cycle		On / off
Camera		
Image Sensor	Sony Exmor 2.07Mega Pixels Sony STARVIS Image Sensor	
Total Pixel	1952(H) x 1113(V), 2.17 Megapixel	
Effective Pixel	1945(H)x 1097(V), 2.13 Megapixel	
Lens	3.6mm~11mm Motorized Lens	
MIN. Illuminance	Color: 0.06 Lux B&W: 0 Lux	
Day & Night	True Day & Night (ICR)	
Electronic Shutter	1/30-30,000	
ELC/ALC	ELC (Normal/Deblur) ALC (Indoor/Outdoor/Deblur)	
White Balance	Auto / Preset / Manual	
WDR	Off / Low / Middle / High	
Defogger	Off / Low / Middle / High (Auto / Manual)	
Action on Event	Pre-alarm & Postalarm buffer, Upload FTP, Email notification, FC	
Audio Compression	M Google notification	
Audio stream	G.711-ulaw, Sampling Rates 8kHz, 16bit, Mono	
Alarm	2 way (Option)	
Video Out	1 In / 1 Out (Option)	
Power Supply	CVBS / AHD / TVI / CVI DC12V / 1A PoE : IEEE 802.3af	
Power Consumption	AI OFF, IR ON : Max. 7.0W AI ON, IR ON : Max. 8.0W	
Operating Environment	-20°C ~ +60°C, 10% ~ 90% RH	
Dimension	84Φ x 332.6(L) x 90(H) mm	
Weight	Approx. 820g	
Network		
System	64bit RISC-V Quad Core up to 594MHz, NOR Flash 512 Mb / LPD	
Compression	DR3 4Gb	
Resolution	H.265, H.264, M-JPEG, JPEG	
Resolution	1920x1080, 1280x720, 720x480, 704x480, 640x352, 320x240	
Max. Frame rate	60fps, 50fps@2M	
Bit rate control	CBR, VBR	
Video Stream	Quadruple Streaming	
Security	IP Filtering, HTTPS, Encrypted & Basic Authentication, Management White List, Digest	
Supported protocols	HTTP, RTP/RTSP (Uni/Multicast), TCP/IP (v4/v6), UDP, FTP, Telnet, HTTPS, RARP, SNMP (option), DHCP, NTP, SMTP client, uPnP & etc	
DDNS	www.ipccctvdns.com	
Interface	RJ45 Ethernet 10/100Mbps	
Programming Interface	SDK, ONVIF Profile S	
Triggering Event	Motion detection, triggering DI, triggering serial input, connected/disconnected, boot finished	
Action on Event	Pre-alarm & Postalarm buffer, Upload FTP, Email notification, FC M Google notification	


### Overview

- **½", 2MP, H.265 HD IP Camera**
- **Sony STARVIS PS CMOS**
- **3.6~11mm Motorized Lens**

### TTA Verified



### Dimension

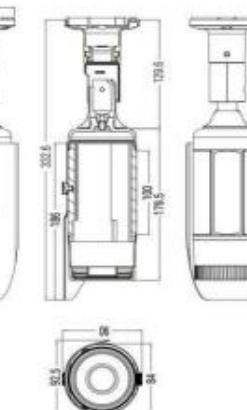

## 商品説明

 사이테크놀로지스(주)	상품명	SAI-P-2360RPS
	HP	<a href="https://tjcctv.co.kr/">https://tjcctv.co.kr/</a>



包装	サイズ	個数	重さ	備考
1個あたり		1	7,000g	
内寸	-			
外寸	-			

FOB	
MOQ	10PCS
サンプル提供価格	3,900,000 KRW

商品仕様	
分類名称	保安用カメラ
原産地	大韓民国
資源再利用可否	該当なし
重さ	7000g
内容量	-
セット内容	228Φ × 356(H) mm
使用期限	-

使用方法
保安用カメラとして録画装備と連携して使用

注意事項
衝撃注意、ネットワーク構成に関する知識が必要

企業紹介
映像監視装置の専門製造企業であり、主に政府調達市場で売上がある。 最近ではAIで事業領域を拡大している。

主要輸出国
米国

## Automatic polarization control system , PTZ **SAI-P-2360RPS**




### Overview

- 1/1.9", 2.42MP PS CMOS Sensor
- Super high sensitive
- Optical 36X & Digital 32X

### TTA Verified



### Dimension

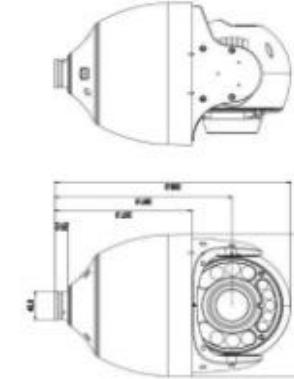

<b>Automatic polarization control system</b>	0° 23° 45° 67° 90°
Polarization angle	On / off
ROI cycle	On / off
<b>Camera</b>	
Image Sensor	1/1.9" Sony 2.42MP CMOS
Lens	Optical 36x (Digital 32x) f=6.0~216.0mm (F1.5-F4.8) FOV(H) : 56.5' ~ 2.12'
	Pan : 360 ° Endless Tilt : 0 ~190 °
Pan Tilt Zoom	Optical Zoom 36x, Digital Zoom 32x (Total 1152x) 255Presets, 8Group, 8Tour, 8Swing. Auto flip, Auto parking, Power-up action. Text display by 9 Pan angles.
Lens	Optical 36x (Digital 32x) f=6.0~216.0mm (F1.5-F4.8) FOV(H) : 56.5' ~ 2.12'
MIN. Illuminance	Color 1/30s : 0.01 lux, B&W 1/30s : 0.05 lux Color DSS on : 0.001 lux, B&W : 0.0002 lux
Day & Night	True Day & Night (ICR)
Exposure control	Shutter: Auto / Priority / Shut, Priority / Manual (1/30s(25s) ~ 1/30, 000s); Brightness; Backlight (BLC, Realtime WDR); Flickless; Iris; DSS, AGC
ELC/ALC	ELC (Normal/Deblur) ALC (Indoor/Outdoor/Manual)
White Balance	Auto/Indoor/Outdoor/Manual
Image Setting	Gamma, sharpness, noise reduction (3DNR), De-Fog, DIS, ACE, HLC, privacy, mirror
Text OSD	Max. 9 lines
Case	Metal
Power Supply	AC to AC Adapter. Output : AC24V / 3A PoE : Optional (60W)
Power Consumption	Max. 42W
Operating Environment	-35°C ~ +60°C, 10% ~ 90% RH
Dimension	228Φ x 356(H) mm
Weight	About 6000g without Bracket & Adapter
Bundle Software	IP Installer PLUS, SMVP lite, Smart NVR Lite
<b>Illuminator</b>	
Type	13EA Power IR LED (Variable angle and distance)
Distance	Max. 400Meter
<b>Network</b>	
System	64bit RISC-V Quad Core up to 594MHz, NOR Flash 512 Mb / LPDDR3 4Gb
Compression	H.265, H.264, M-JPEG, JPEG
Resolution	1920x1080, 1280x720, 720x480, 704x480, 640x352, 320x240
Max. Frame rate	60fps, 50fps@2M
Bit rate control	CVBR, CBR, VBR
Video Stream	Quadruple Streaming
Security	IP Filtering, HTTPS, Encrypted & Basic Authentication, Management White List, Digest, HTTP, RTP/RTSP (Uni/Multicast), TCP/IP (v4/v6), UDP, FTP, Telnet, HTTPS, RARP, SNMP (option), DHCP, NTP, SMTP client, uPnP & etc
DDNS	www.ipccitvdns.com
Interface	RJ45 Ethernet 10/100Mbps
Programing Interface	SDK, ONVIF Profile S
Triggering Event	Motion detection, triggering DI, triggering serial input, connected/di soonected, boot finished
Action on Event	Pre-alarm & Post-alarm buffer, Upload FTP, Email notification, FC M Google notification